

**Built for Your**



**Industry**



(a subsidiary of Bright Coop, Inc.)

*built the way you want it for the way you use it!*

## 60-Ton/4-Axle Oilfield

**Model: VLO57102-4-60T**

**Weight 27,100 lbs. Plus or Minus 3%**



The oil and gas industry has always required heavy hauling equipment. Everything used in this industry is heavy. The ability to move heavy sections of equipment from one location to another has always been the method. This trailer is designed to do just that. With a 60 ton rating and the ability to winch up over the 8-5/8" tailroller, equipment can be loaded quickly and transported safely to the next location. The Heavy Duty 8-5/8" tailroller is designed with service in mind. The bearings are replaceable and greaseable. If your loading skids, rig sections, or crew quarters, this trailer does it all. Built to last, built Viking tough. Capacity: 150,000 lb. GVWR.



# Built for Your



# Industry




(a subsidiary of Bright Coop, Inc.)

*built the way you want it for the way you use it!*

## 60-Ton/4-Axle Oilfield

## Model: VLO57102-4-60T

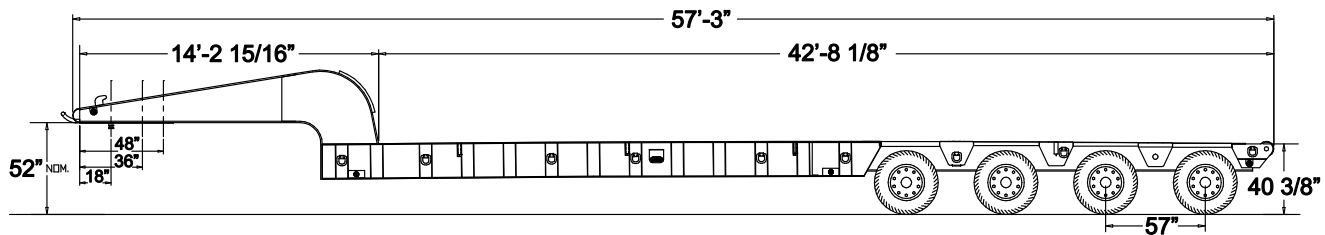

102" Wide Weight 27,100 lbs. Plus or Minus 3% Capacity: 150,000 lb. GVWR

### Features:

- Mainframe..... 20" Fabricated main beams with 1-1/2" camber, 3/4" x 6" top and bottom flange, 3/8" web welded on both sides, fixed neck with a 6-5/8" neck roller. All flange and web material is high strength steel.
- Crossmembers... 10" x 15# I beam on 18" centers.
- Kingpin..... 2" SAE kingpin, 3/8" plate with (3) drop-in kingpin locations for the following swing clearances, 120", 102", and 90".
- Siderails..... 20" Fabricated beam, 1/2" x 5" top and bottom flange, 1/4" web welded on both sides
- Suspension..... Hendrickson® HT250US air ride with front axle lift, manual dump valve and leveling valve.
- Axles..... (4) 25,000 Lb., 5" round, 5/8" wall, 77-1/2" track.
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (4S/2M) ABS on two axles.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 255/70R x 22.5 Radials.
- Landing gear..... None, outfitted with front half pipe with heavy duty pick-up eye.
- Finish..... Shotblasted and painted with a high solid polyurethane paint. Colors: black or red (standard.) Optional, epoxy or zinc-rich primer available.
- Floor..... 1-3/4" Apitong (standard), smooth steel plate over the axles, metal tread plate recessed in the neck.
- Lights..... 7-Way main receptacle, sealed wiring harness with rubber mounted LED lights. 5 Lights per side including mid-turn.
- Axle setting..... Rear axle set at 27" from the rear of the trailer with 57" axle spacing.
- Pin pockets..... (8) Total (4) per side including tail roller.
- Pipe pockets..... (4) Total (2) per side.
- Tail roller..... 8-5/8" Tail roller with (2) sets of overload rollers.
- Neck roller..... 6-5/8" Neck roller.
- Rear bumper..... Heavy duty push bumper with drag loops and high visibility reflective conspicuity tape.
- D-rings..... (18) (9) Each side.

### Options:

- Pop-up deck rollers
- 50 Ton 3-axle configuration
- Aluminum wheels

**Viking Specialized Trailers, L.L.C.**  
1730 S.W. Stalling Dr., Suite 101  
Nacogdoches, Texas 75964  
(936) 564-8370 (844) 815-6210  
Fax (936) 205-9171  
[www.vikingspztrailers.com](http://www.vikingspztrailers.com)