

Built for Your



Industry



(a subsidiary of Bright Coop, Inc.)

built the way you want it for the way you use it!

“Equipment Transport” Lowboy

Model: VPDDR-45 Weight 12,600 lbs. Plus or Minus 3%



The Equipment Transport trailer was designed to deliver two 4-wheel machines on site. It also has the ability to haul fuel and other items needed in the field on the upper deck. The two lift transport is a must have when getting equipment delivered on site. Three wheel machines can also be hauled with the addition of a third ramp. Capacity: 80,000 lb. GVWR.






(a subsidiary of Bright Coop, Inc.)

built the way you want it for the way you use it!

“Equipment Transport” Lowboy Model: VPDDR-45

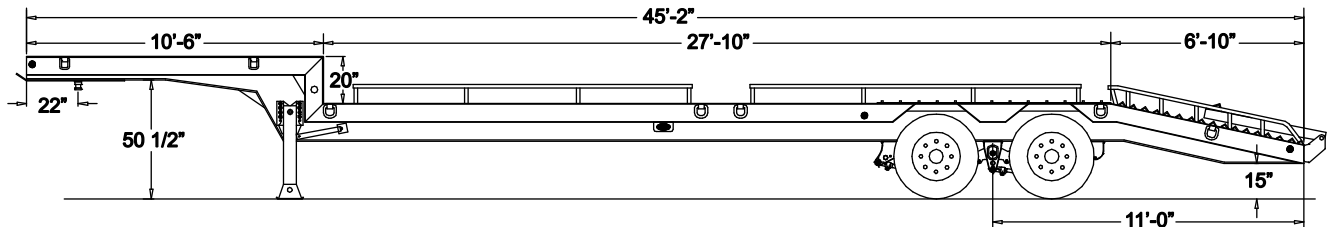

102" Wide Weight 12,600 lbs. Plus or Minus 3% Capacity: 80,000 lb. GVWR

Features:

- Mainframe..... 16" Fabricated main beams, 1/2" x 6" top flange and 3/4" x 6" bottom flange with 1/4 web welded on both sides. All flange and web material is high strength steel.
- Crossmembers... 6" x 7.3# Jr. I-beam on 16" centers.
- Kingpin..... 2" SAE kingpin, 3/8" kingpin plate, 22" kingpin setting (standard).
- Siderails..... 8" x 8.5# (Inverted) structural channel.
- Suspension..... HUTCH® H9700T three point spring suspension with hi-arch heavy duty 3 leaf springs.
- Axles (2) 25,000 Lb., 5" round, 5/8" wall.
- Brakes..... 16-1/2" x 7", Type 30/30 brake chambers, outboard drums, Meritor WABCO® (2S/1M) ABS on one axle.
- Wheels..... 8.25 x 22.5, Steel 10 hole disc, hub piloted (color: white).
- Tires..... 255/70R x 22.5 Radials.
- Landing gear..... Holland® Mark V 2 speed gear with 62,500 lb. lift capacity; 200,000 lb. static capacity (standard).
- Finish..... Shotblasted and painted with a high solid polyurethane paint. Colors: black or red or cat yellow (standard). (optional: epoxy or zinc-rich primer available).
- Floor..... 1-1/2" Shiplap treated pine (standard). 1/4" tread plate with 1" traction bars over tandems.
- Lights..... 7-Way main receptacle, sealed wiring harness, rubber mounted LED lights. 3 Lights per side including mid-turn.
- Tandem..... Set at 132" from the rear of the dovetail.
- Dovetail..... 6' 6" Long; self cleaning inverted angle iron.
- Loading ramps... (2) 6' Stand up ramps with double compression springs.
- D-rings..... 14 Total (4) 1" on front deck, (10) 1" on rear deck.

Options:

- Flooring, apitong, steel
- 3 Third ramp for 3-wheel loader
- Optional paint colors available

Viking Specialized Trailers, L.L.C.
1730 S.W. Stalling Dr., Suite 101
Nacogdoches, Texas 75964
(936) 564-8370 (844) 815-6210
Fax (936) 205-9171
www.vikingspztrailers.com